

**VULCAN****VACB SERIES  
COUNTER MODEL GAS CHARBROILER****VULCAN**AZ780  
ISO9001  
Vulcan-Hart Co.**MODEL: VACB SERIES COUNTER MODEL GAS CHARBROILER****MODEL VACB47****CSA design certified. NSF listed.****SPECIFICATIONS**

Low profile, high volume gas charbroiler, Vulcan-Hart Model No. \_\_\_\_\_. Stainless steel front, sides, top trim and grease trough. Full width front grease collection drawers. Heavy cast iron char-radiants. 5¼" wide cast iron diamond grates. Supercharger burner dividers. One 18,000\* BTU/hr. burner for each broiling grate. Underburner deflector system reflects heat upwards. Standing pilot ignition system. One infinite heat control valve for each burner. 4" adjustable legs. ¾" rear gas connection and gas pressure regulator. Exterior dimensions \_\_\_\_" wide x 33" deep x 11½" working height.

**SPECIFY TYPE OF GAS WHEN ORDERING.  
SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.**

**BASIC MODELS:**

VACB20 20-1/8" wide	VACB47 46-3/4" wide
VACB25 25-3/8" wide	VACB60 60-5/8" wide
VACB36 36-1/8" wide	VACB72 72-5/8" wide

**STANDARD FEATURES:**

- Stainless steel sides, control panel, top trim, backsplash and grease trough
- Full width front grease drawer
- Heavy duty cast iron char-radiants
- 5-1/4" wide cast iron diamond grates
- One 18,000 BTU/hr burner for each broiler grate\*
- Standing pilot ignition system
- One infinite heat control valve for each burner
- Underburner deflector system reflects heat upwards creating a "Cool Zone" in the grease drawer and drip areas.
- 4" adjustable legs
- ¾" rear gas connection and gas pressure regulator
- Supercharger burner dividers minimize heat transfer to enhance multi-zone cooking capability
- One year limited parts and labor warranty

\*VACB20 has one 20,000 BTU/hr burner for each grate

**OPTIONS:**

- 6" legs
- Cutting board
- 12¼" deep Plate rail
- Condiment rail
- Back and side splash kit
- Griddle plate
- Welded steel diamond and round rod grates.
- 10-1/2" wide griddle plate inserts
- Stainless steel stand with undershelf and casters



# VACB SERIES

## COUNTER MODEL GAS CHARBROILER

### INSTALLATION REQUIREMENTS:

1. A gas pressure regulator supplied with the unit must be installed;  
Natural Gas 5.0" (127 mm) W.C.  
Propane Gas 10.0" (254 mm) W.C.
2. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by writing to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269. When writing refer to NFPA No. 96.
3. These units are manufactured for installation in accordance with National Fuel Gas Code, ANSI-Z223.1/NFPA #54 (latest edition). Copies may be obtained from The American Gas Association, Accredited Standards Committee Z223 @ 400 N. Capital St. NW, Washington, DC 20001, or the Secretary Standards Council, NFPA, 1 Batterymarch Park, Quincy, MA 02169-7471.




### NOTE: In The Commonwealth of Massachusetts

All gas appliances vented through a ventilation hood or exhaust system equipped with a damper or with a power means of exhaust shall comply with 248 CMR.

### 4. CLEARANCES

	Combustible	Non-Combustible
rear	12"	3"
sides	9"	3"

5. This appliance is manufactured for commercial installation only and is not intended for home use.

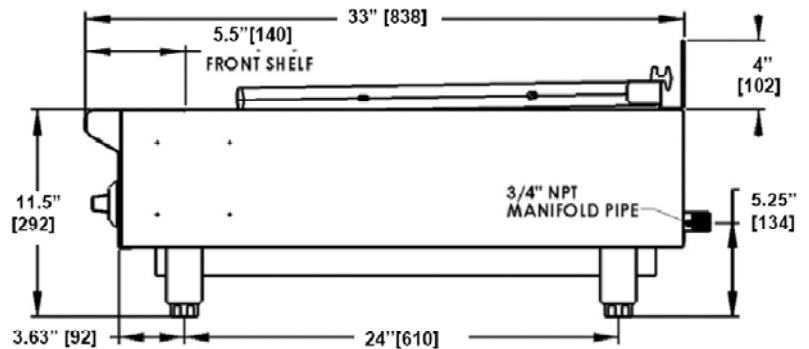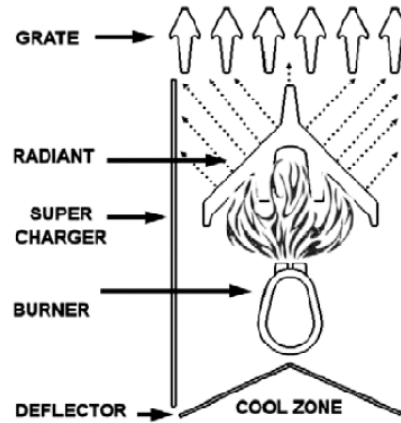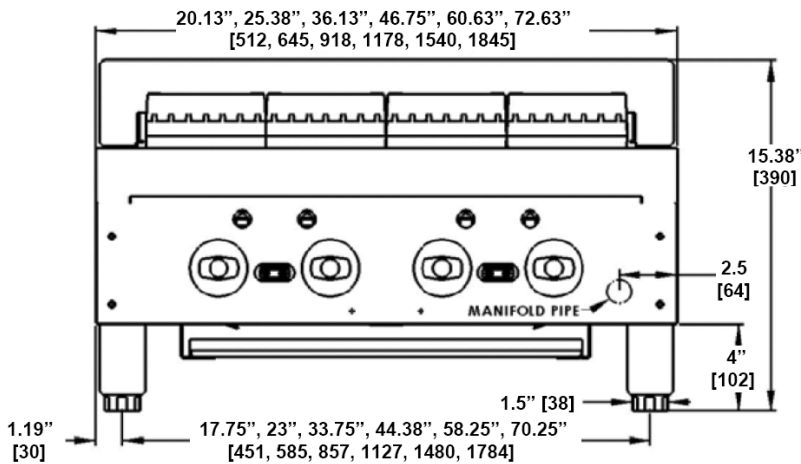

MODEL	WIDTH	DEPTH	OVERALL* HEIGHT	WORKING* HEIGHT	BROILING AREA	# BURNERS	TOTAL BTU/HR	APPROX SHIP WT (LB/KG)
VACB20	20-1/8"	33"	17-3/8"	11-1/2"	16-1/4 X 22-5/16	3	60,000	225/102
VACB25	25-3/8"				21-1/2 X 22-5/16	4	72,000	290/131
VACB36	36-1/8"				32-1/4 X 22-5/16	6	108,000	370/167
VACB47	46-3/4"				43 X 22-5/16	8	144,000	450/203
VACB60	60-5/8"				57 X 22-5/16	11	198,000	500/225
VACB72	72-5/8"				68-3/4 X 22-5/16	13	234,000	580/263

\*These are nominal dimensions and can vary by + 1.75" with adjustable legs.

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.